

UG415DSUK

Product Family	Dishwasher
Subfamily	Undercounter glasswasher
Series	Topline
Basket dimensions	400x400 mm
Default power supply	230 V~ / 12 A / 2,6 kW / 50 Hz
Width	460 mm
Depth	600 mm
Height	705 mm
Depth with door open	930 mm
Usable load height	300 mm
Maximum plate diameter	300 mm
Maximum glass height	300 mm



Target

Potential users	Bars/Cafes; Restaurants/Catering
-----------------	-------------------------------------

Aesthetics

Control Panel	Electronic	Led colour	White
---------------	------------	------------	-------

Functions



Functions	Triple filter; HTR; Door clearance 300mm
-----------	--

Programmes

Programs

Boiler 71°C/Tank 60°C-1'20" Boiler 85°C/Tank 60°C-1'10" Boiler 85°C/Tank 60°C-1'30"

Boiler 85°C/Tank 60°C-2' Boiler 85°C/Tank 60°C-3' Boiler 71°C/Tank 60°C-2'10"

Boiler 85°C/Tank 60°C-4'10"

Drain and self cleaning cycle	Yes
Maximum baskets/hour	72

Maximum plates/hour	576
Maximum glasses/hour	960

Interface

Panel	Easyline 2016	Low detergent alert	Yes
Display	TFT	Cycle progress indicator	Yes
Number of buttons	5	End of cycle indicator	Yes
On/off indicator	Yes	Manual diagnostics	Yes
Low rinse aid alert	Yes		

Construction

Tank	Deep drawn	Door gasket	On 3 sides
Tank construction	Double skinned	Rack guides	Embossed
Tank material	Stainless steel AISI 304	Wash tank capacity	7 l
Back panel	Galvanized	Boiler capacity	4 l
Door	Double skinned	Noise level	Lpa 56 dBA
Counter balanced door	Yes	Protection class	IPX4
Tank filter	Stainless steel	Net weight (kg)	45.500 kg
Wash arm	Stainless steel AISI 304	Adjustable feet	25 mm
Rinse arm	Stainless steel AISI 304	Drain max. height	600 mm

Consumption and connections

Tank heating element	2000 W	Warm water connection	Cold 15°C
Boiler heating element	4500 W	Inlet water maximum temperature	60°C
Wash pump	290 W	Max water hardness	54°FH - 30°dH
Default connection	4800 W	Water inlet pressure	1-6 bar / 100-600 kPa
Water consumption per cycle	2,3 l		

Electrical Connection

Plug	Not present
------	-------------

Manuals and Certifications

Certificate	CE, UKCA
-------------	----------


Equipment

Peristaltic detergent pump	Yes, electronic control	Rinse pump with H.T.R. system	Rinse pump with atmospheric boiler
Integral continuous water softener	Yes	Break tank	Yes

Peristaltic rinse aid pump	Yes, electronic control	Partial water exchange in the wash tank via built-in drain pump	Yes
Soft Start	Yes	Water supply pipe diameter	DN10 - 3/8"
Boiler thermostat	Yes	Drain supply pipe diameter	21.5 mm
Wash tank thermostat	Deep drawn	Automatic start	Yes
Cycle counter	Yes	Chemical level probe	Yes, optional KITSONLIV
Drain pump with 3 stage filter system	Yes		

Accessories Included

Glass basket	WB40G02	Water supply pipe	Yes - 1.5m
Cutlery basket	PHOOS01	Drain pipe	Yes - 2m
Flat basket	WB40G01		

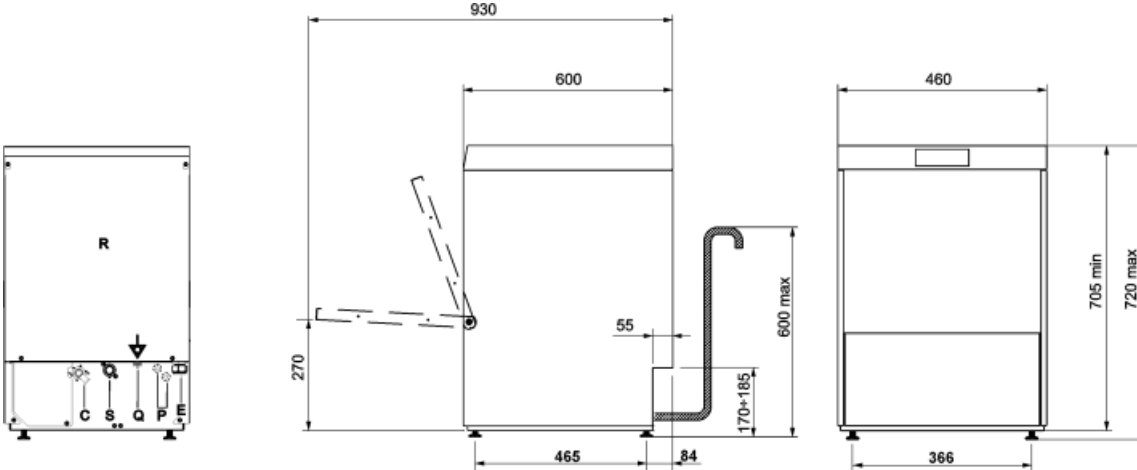

R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE

Not included accessories



RB40G01

Universal wire basket with flat base 400



RB40A3

Adapter for round basket



WH00C01

Wire insert for cups



RB40A4

Adapter for round basket for 486 cm double wall models



KITSONLIV

Probe level kit




WH00S01

Wire insert for 12 small dishes



PHOOS01

Single basket in polypropylene for cutlery



WB40G01

Universal wire basket with flat bottom 400x400



WB40G02

Wire basket for 8 glasses, max diameter 90mm, inclined bottom 400x400



WS4

Underframe for glasswasher 400mm



KITDETKCC400

Kit for detergent (1l) and rinse storage (1l) for dishwashers 400x400

WB40G03

Wire basket for 8 glasses, inclined bottom, 4-row 400x400



WB40D01

Wire basket for 8 dishes 400x400



PHOOS02

Basket in polypropylene for cutlery with 6 compartments

Symbols glossary



HTR rinsing system



Triple filter



MAX. LOAD HEIGHT 300mm