

W65
7KG

W80
9KG

W100
11KG

Schulthess proLine W-Series

Swissmade Commercial Washing Machines



KEY FEATURES

- Freestanding, high-speed washing machine
- Powder-coated steel housing, matt grey
- Stainless steel drum and outer drum
- Intuitive operation with 4.3-inch colour display
- Control system «Expert»
- Ergonomic detergent dispenser
- Laundry trap protection
- Convenient loading / unloading through large door
- Hot water connection
- Drain valve
- Time preselection up to 7 weekdays
- 23 languages
- Connection for 8 liquid detergent dosing pumps

OPTIONS

- Control system «Expert+»
- Stainless steel housing
- USB interface
- Machine plinth 280 mm
- Machine plinth with lint filter drawer
- Drain pump
- Machine hygiene monitoring via USB
- Art-Line (anthracite)

COST

- Compact, robust and durable quality product
- Low maintenance, saves costs
- Environmentally friendly wetClean

EFFICIENCY

- Fast washing cycles
- Freely programmable wash cycles
- Intuitive touch control panel
- Simple, safe operation

RESULTS


- Hygiene safety
- Disinfection programmes
- Hygiene monitoring
- Perfect washing results

SPECIFICATIONS

Company Or Brand Name		Schulthess		
Type of appliance		Washing Machine		
Type of sales description	proLine	W65	W80	W100
Product no.		4201.1	4202.1	4203.1
Properties				
Fill ratio (1:9)	kg	7	9	11
Filling quantity (1:10)	kg	6,5	8	10
Drum volume	l	65	80	100
Drum opening diameter	mm	355	355	355
Drum diameter	mm	517	517	517
Drum depth	mm	302	372	464
Spin speed	rpm	1200	1200	1200
G-factor		416	416	416
Residual moisture	%	46	46	46
Programme duration cold water connection ²	minutes	52	55	57
Programme duration hot water connection 70 °C ²	minutes	46	47	48
Energy consumption ^{3/4)}	in kWh	1,1/0,34	1,5/0,42	1,7/0,42
Water consumption ²	in litres	56	67	90
Electrical Requirements				
Supply voltage	V	400 3N~/ 50 Hz	400 3N~/ 50 Hz	400 3N~/ 50 Hz
Connected load	kW	10	10	10
Electric heating	kW	9,0	9,0	9,0
Drive	kW	1,0	1,0	1,0
Protection	A	16	16	16
Plumbing Requirements				
Water pressure on site	MPa	0,15 -1,0	0,15 -1,0	0,15 -1,0
Cold water hard inflow ¾-inch	litre/min	>13	>13	>13
Hot water supply from central boiler max. 70 °C ¾-inch	litre/min	>13	>13	>13
Drain quantity drain valve x 50 mm	litre/min	260	260	260
Drain pump diameter 22 mm	litre/min	32	32	32
Control System				
Standard programmes		Expert/Expert +	Expert/Expert +	Expert/Expert +
24 programmes, freely programmable		•/•	•/•	•/•
ProfiClean sets		-/•	-/•	-/•
Disinfection programmes		-/•	-/•	-/•
WetClean programmes		-/•	-/•	-/•

Explanations:

- not available • available ²⁾Cotton 60 ° c without pre-wash ³⁾Cotton 60 ° c prg. cold water ⁴⁾Cotton 60 ° c prg. hot water 70 ° c

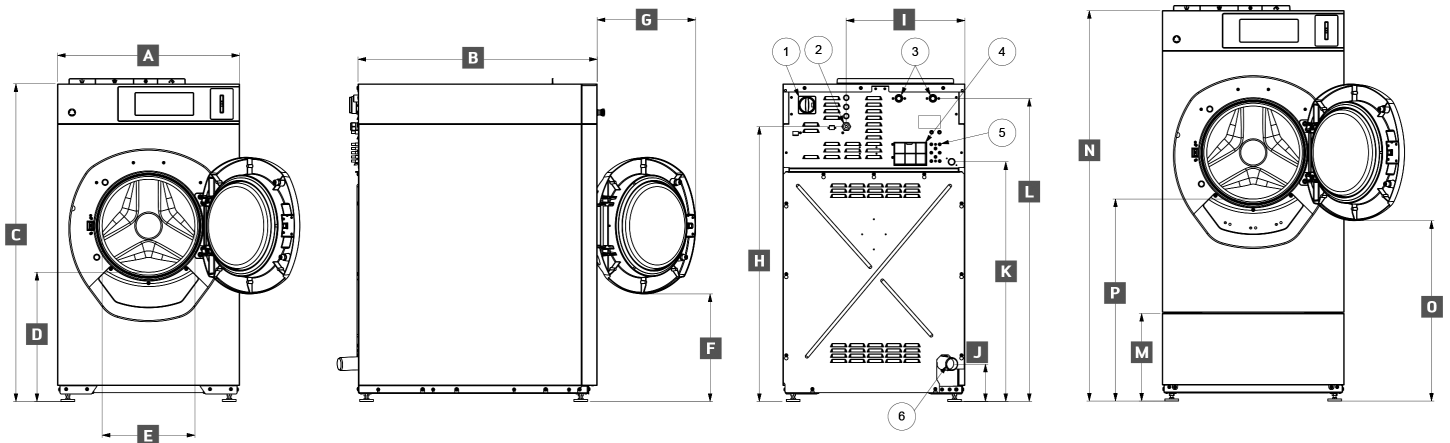

DIMENSIONS

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Weight (kg)
W65	696	820	1210	500	355	355	380	1050	455	150	915	1160	330	1490	690	780	200
W80	696	820	1210	500	355	355	380	1050	455	150	915	1160	330	1490	690	780	210
W100	696	915	1210	500	355	355	380	1050	455	150	915	1160	330	1490	690	780	220