

TUMBLE DRYERS

**DX
RANGE**

DX 11	DX 13	DX 16	DX 24
11KG 25LB	13KG 30LB	16KG 35LB	24KG 53LB



FEATURES

- Controls:
 - Dual Digital Control or OPL Micro
 - Coin operated version: XQ-Control
- Electrical, Gas and Steam heating
- Large door opening for easy loading and unloading
(Ø 57cm DX11,13,16, Ø 68cm DX24)
- Galvanized drum
- Axial airflow
- Large lint filter

OPTIONS

- Stainless steel drum
- Stainless steel front panel with black painted door
- Coin operated version
- Reversing drum
- Residual moisture control Sensodry+®
(only with Full OPL Micro):
 - lower energy and utility costs
 - lower linen replacement costs
- SafeTech™ Fire Suppression System



FAST DRYING



EASY
OPERATION




SERVICE
FRIENDLY

senso.dry+


SafeTech™

TYPE		DX11	DX13	DX16	DX24
CAPACITY					
Capacity	kg	11	13	16	24
Drum volume	l	220	270	350	490
Drum diameter	mm	Ø 673	Ø 673	Ø 762	Ø 838
AIRFLOW					
Airflow	l/s	240	240	280	330
DRYING AVERAGE					
Gas heating	g/min	226	267	349	485
Electric heating	g/min	172	258	340	371
MOTOR					
Fan	kW	0,4	0,4	0,4	0,4
Drive	kW	0,2	0,2	0,2	0,4
GAS HEATING					
Energy	kW	18,8	21,4	26,4	32,8
Energy	kBTU/h	64	73	90	112
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz			
Gas connection	NPT	½"	½"	½"	½"
STEAM HEATING					
High pressure 6,9 bar	kW	24,47	24,47	30,3	-
	kBTU/h	83,5	83,5	103,4	-
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz			
Steam connection	NPT	¾"	¾"	¾"	-
ELECTRICAL HEATING					
Energy	kW	12	21	24	27
Electrical connection		1×200-208V/50-60Hz, 3×200-208V/50-60Hz, 1x 230-240V/50-60Hz, 3x 230-240V/50-60Hz, 3x 380V/50-60Hz, 3x400-415V/50-60Hz, 3x 440V/50-60Hz, 3x 460-480V/50-60Hz			
EXHAUST	Ø /mm	150	150	200	200
DIMENSIONS					
Size H×W×D	mm	1625×710×1000	1625×710×1155	1625×800×1155	1700×925×1350
Net weight (E)	kg	140	150	160	200
Net weight (G,S)	kg	135	145	155	195
TRANSPORT DATA					
Packed (foil) H×W×D	mm	1720×760×1090	1720×760×1240	1720×840×1240	1790×900×1450
Gross weight (foil, E)	kg	150	160	170	220
Gross weight (foil,G,S)	kg	145	155	165	215
Packed (crate) H×W×D	mm	2210×880×1170	2210×880×1320	2210×950×1320	2210×1020×1520
Gross weight (crate, E)	kg	210	220	230	300
Gross weight (crate,G,S)	kg	205	214	220	295

Side DX 11 13 16 24

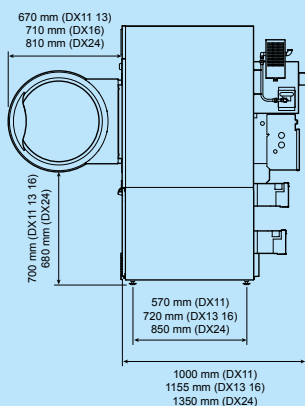

Back DX 11 13 16 24

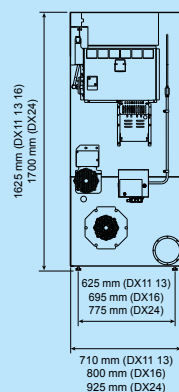

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

Primus by Alliance Laundry Systems

