

TUMBLE DRYERS

DX
RANGE

DX 34

34KG
75LB



FEATURES

- Controls:
 - Dual Digital Control or OPL Micro
 - Coin operated version: XQ-Control
- Electrical, Gas and Steam heating
- Large door opening for easy loading and unloading (Ø 68cm)
- Galvanized drum
- Radial airflow
- Large lint filter

OPTIONS

- Stainless steel drum
- Coin operated version
- Reversing drum
- Residual moisture control Sensodry+® (only with Full OPL Micro):
 - lower energy and utility costs
 - lower linen replacement costs
- SafeTech™ Fire Suppression System



FAST DRYING



EASY
OPERATION




LARGE DOOR
OPENING

senso.dry+

SafeTech™

TYPE		DX34
CAPACITY		
Capacity	kg	34
Drum volume	l	634
Drum diameter	mm	Ø 940
AIRFLOW		
Airflow	l/s	380 (G 330)
DRYING AVERAGE		
Gas heating	g/min	571
Electric heating	g/min	521
MOTOR		
Fan	kW	0,4
Drive	kW	0,4
GAS HEATING		
Energy	kW	48,4
Energy	kBTU/h	165
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz
Gas connection	NPT	½"
STEAM HEATING		
High pressure 6,9 bar	kW kBTU/h	39,24 133,9
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz
Steam connection	NPT	¾"
ELECTRICAL HEATING		
Energy	kW	36
Electrical connection		1×200-208V/50-60Hz, 3×200-208V/50-60Hz, 1x 230-240V/50-60Hz, 3x 230-240V/50-60Hz, 3x 380V/50-60Hz, 3x400-415V/50-60Hz, 3x 440V/50-60Hz, 3x 460-480V/50-60Hz
EXHAUST	Ø /mm	200
DIMENSIONS		
Size H×W×D	mm	1960×980×1350
Net weight (E, G, S)	kg	320, 310, 325
TRANSPORT DATA		
Packed (foil E, G) H×W×D	mm	2060×1050×1420
Packed (foil S) H×W×D	mm	2120×1050×1420
Gross weight (foil,E,G,S)	kg	340, 330, 350
Packed (crate) H×W×D	mm	2240×1170×1500
Gross weight (crate,E,G,S)	kg	410, 395, 415

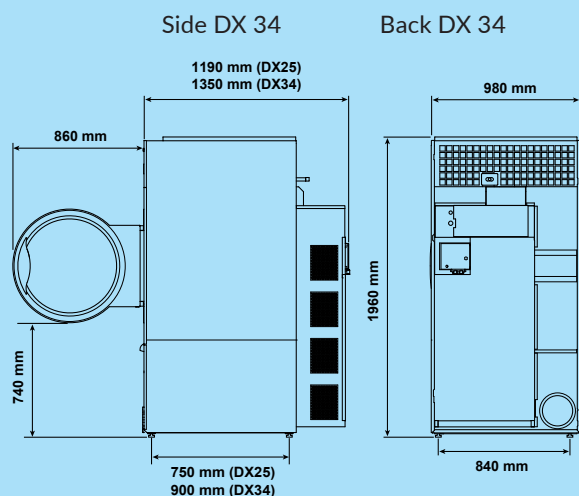

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

Primus by Alliance Laundry Systems

