

UW5757DPS

Product Family	Dishwasher
Subfamily	Utensil dishwasher
Basket dimensions	570x570 mm
Default power supply	400 V 3N~ / 9,1 kW / 50 Hz
Width	685 mm
Depth	750 mm
Height	1725 mm
Height with door open	2000 mm
Depth with door open	1110 mm
Usable load height	650 mm
Maximum height with no-basket washing	650 mm



Target

Potential users	Hotels; Restaurants/Catering; Bakery/Pastry making; Industrial pastry&bakery laboratories; Butcher's shops; Meat processing industry; Schools; QSR
-----------------	---

Aesthetics

Series	Utensil dishwasher	Led colour	Red
Control Panel	Electronic		

Functions



Functions	Euronorm trays washing; GN 1/1 trays washing; HTR; Door clearance 640mm
-----------	---

Programmes

Utensil washer programs

1- 120" (92" at 60°C - rinse 18" at 85°C)	2- 240" (212" at 60°C - 10" dripping pause - rinse 18" at 85°C)	3- Endless at 60°C - 10" dripping pause - rinse 18" at 85°C
---	---	---

Maximum baskets/hour 30

Interface

Panel	Utensil Dishwasher	Number of buttons	3
Display	4 digit	On/off indicator	Yes

Construction

Tank	With printed base	Rack guides	Welded
Tank material	Stainless steel AISI 304	Wash tank capacity	36 l
Back panel	Galvanized	Boiler capacity	12 l
Door	Double skinned	Protection class	IPX4
Tank filter	Stainless steel	Net weight (kg)	135,000 kg
Wash arm	Stainless steel AISI 304	Adjustable feet	130 mm
Rinse arm	Stainless steel AISI 304	Drain max. height	800 mm

Consumption and connections

Tank heating element	4500 W	Water consumption per cycle	5 l
Boiler heating element	7500 W	Warm water connection	Cold 15°C
Default connection	9100 W	Inlet water maximum temperature	60°C
UW washing pump	1600W	Max water hardness	12°FH - 7°dH
Electrical connection options	230 V 3N~ / 9,1 kW / 50 Hz		

Electrical Connection

Plug	Not present
------	-------------

Manuals and Certifications


Certificate	CE
-------------	----

Equipment

Peristaltic detergent pump	Yes, electronic control	Drain pump	Yes
Detergent (red) hose length	Yes, manual	Rinse pump with H.T.R. system	Rinse pump with atmospheric boiler
Peristaltic rinse aid pump	Yes, electronic control	Break tank	Yes
Detergent flow rate	1.5 l/h	Partial water exchange in the wash tank via built-in drain pump	Yes
Rinse aid (blue) hose length	Yes, manual	Water supply pipe diameter	16 mm
Rinse aid flow rate	0.4 l/h	Drain supply pipe diameter	21.5 mm
Soft Start	Yes	1/1GN tray washing option	Yes
Boiler thermostop	Yes		

Accessories Included

Flat basket	WB5757G01	Drain pipe	Yes - 2m
Water supply pipe	Yes - 2,5m		

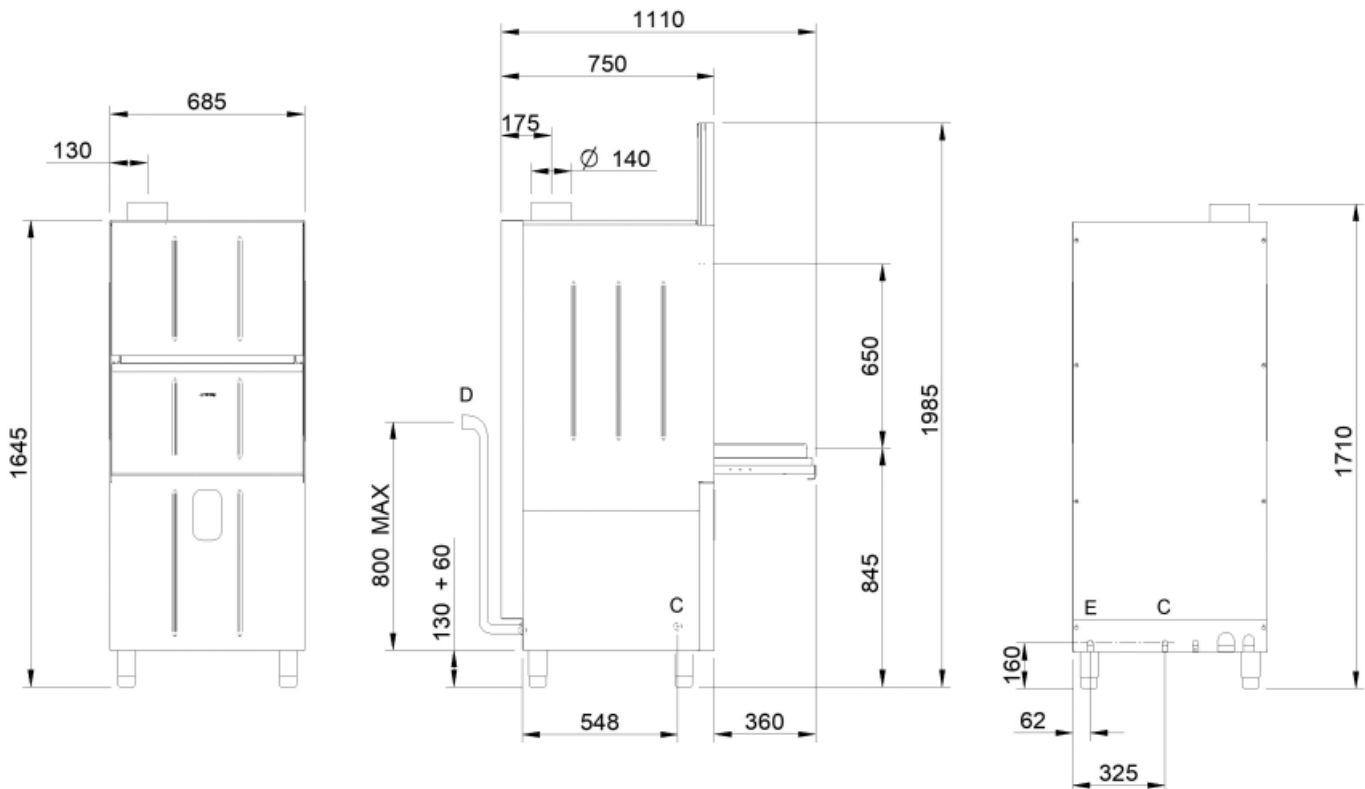

Not included accessories



WB5757T01

Stainless steel basket for 5
utensilwasher trays




WB5757G01

Universal basket with flat bottom for
utensilwasher



WH00B02

Block for utensilwasher saccapoche



WH00S02

Basket for utensilwasher tools



WH00B01

Insert for utensilwasher saccapoche



WB5757T02

Stainless steel basket for 8
utensilwasher trays

Symbols glossary



SUITABLE FOR EURONORM TRAY



Suitable for 1/1GN trays



HTR rinsing system



...