

# UW60132DPS

Product Family	Dishwasher
Subfamily	Utensil dishwasher
Basket dimensions	600x1320 mm
Default power supply	400 V 3N~ / 18 kW /50 Hz
Width	1450 mm
Depth	865 mm
Height	2095 mm
Height with door open	2430 mm
Depth with door open	1255 mm
Usable load height	850 mm



## Target

Potential users	Restaurants/Catering; Industrial pastry&bakery laboratories; Meat processing industry; Schools
-----------------	--

## Aesthetics

Series	Utensil dishwasher	Led colour	Red
Control Panel	Electronic		

## Functions



Functions	Euronorm trays washing; GN 1/1 trays washing; HTR; Door clearance 850mm
-----------	---

## Programmes

### Utensil washer programs

1- 120" (92" at 60°C - rinse 18" at 85°C)	2- 240" (212" at 60°C - 10" dripping pause - rinse 18" at 85°C)	3- Endless at 60°C - 10" dripping pause - rinse 18" at 85°C
---	---	---

Maximum baskets/hour	30
Maximum plates/hour	720

## Interface

Panel	Utensil Dishwasher	Number of buttons	3
Display	4 digit	On/off indicator	Yes

## Construction

Tank	With printed base	Rack guides	Welded
Tank material	Stainless steel AISI 304	Wash tank capacity	130 l
Back panel	Galvanized	Boiler capacity	17 l
Door	Double skinned	Protection class	IPX4
Tank filter	Stainless steel	Net weight (kg)	335,000 kg
Wash arm	4 in stainless steel	Adjustable feet	150 mm
Rinse arm	4 in stainless steel	Drain max. height	950 mm

## Consumption and connections

Tank heating element	6000 W	Water consumption per cycle	7,5
Boiler heating element	12000 W	Warm water connection	Cold 15°C
Default connection	18600 W	Inlet water maximum temperature	60°C
UW washing pump	3x2200W	Max water hardness	12°FH - 7°dH
Electrical connection options	230 V~ / 29 A / 18 kW / 50 Hz		

## Electrical Connection

Plug	Not present
------	-------------

## Manuals and Certifications

Certificate	CE
-------------	----


## Equipment

Peristaltic detergent pump	Yes, electronic control	Drain pump	Yes
Detergent (red) hose length	Yes, manual	Rinse pump with H.T.R. system	Rinse pump with atmospheric boiler
Peristaltic rinse aid pump	Yes, electronic control	Break tank	Yes
Detergent flow rate	1.5 l/h	Partial water exchange in the wash tank via built-in drain pump	Yes
Rinse aid (blue) hose length	Yes, manual	Water supply pipe diameter	16 mm
Rinse aid flow rate	0.4 l/h		

Soft Start	Yes	Drain supply pipe diameter	21.5 mm
Boiler thermostop	Yes	600x400 mm tray/box washing option	Yes
		1/1GN tray washing option	Yes

## Accessories Included

Cutlery basket	1 x WH00S02	Drain pipe	Yes - 2m
Water supply pipe	Yes - 2,5m		

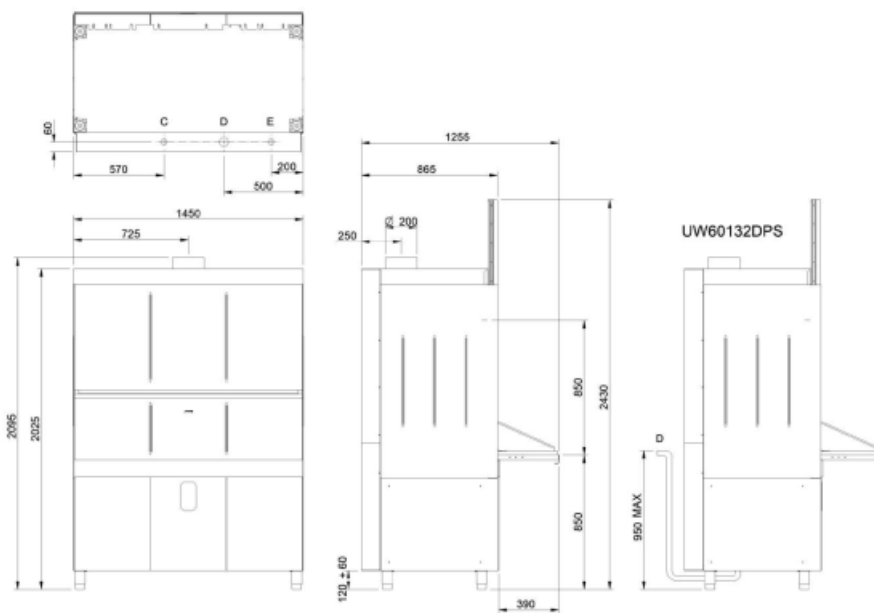

D = SCARICO 1/2", VIDANGE 1/2", DRAIN 1/2", ABFLUSS 1/2", DESAGÜE 1/2", СИББ 1/2"

C = CARICAMENTO ACQUA 3/4" GAS; CHARGEMENT EAU 3/4" GAS; WATER INLET 3/4" GAS; ZUFLOSS 3/4" GAS; CARGA AGUA 3/4" GAS; НАБОР ВОДЫ 3/4" GAS

E = ALLACCIAMENTO ELETTRICO; BRANCHEMENT ELECTRIQUE; ELECTRIC CONNECTION; ELEKTRISCHER ANSCHLUSS; CONEXION ELECTRICA; ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

---


## Not included accessories

---



**WB6070G01**

Utensilwasher wire basket with flat bottom 700x600



**WB60132G02**

Utensilwasher grid




**WH00B01**

Insert for utensilwasher saccapoché



**WH00B02**

Block for utensilwasher saccapoché



**WH00S02**

Basket for utensilwasher tools

## Symbols glossary

---



SUITABLE FOR EURONORM TRAY



Suitable for 1/1GN trays



HTR rinsing system



MAX.USABLE HEIGHT 850mm