

UW6070DPS

Product Family	Dishwasher
Subfamily	Utensil dishwasher
Basket dimensions	600x700 mm
Default power supply	400 V 3N~ / 18 kW /50 Hz
Width	800 mm
Depth	865 mm
Height	2095 mm
Height with door open	2430 mm
Depth with door open	1255 mm
Usable load height	850 mm



Target

Potential users	Hotels; Restaurants/Catering; Bakery/Pastry making; Industrial pastry&bakery laboratories; Butcher's shops; Meat processing industry; Schools; QSR
-----------------	--

Aesthetics

Series	Utensil dishwasher	Led colour	Red
Control Panel	Electronic		

Functions



Functions	Euronorm trays washing; GN 1/1 trays washing; Door clearance 850mm
-----------	--

Programmes

Utensil washer programs

1- 120" (92" at 60°C - rinse 18" at 85°C)	2- 240" (212" at 60°C - 10" dripping pause - rinse 18" at 85°C)	3- Endless at 60°C - 10" dripping pause - rinse 18" at 85°C
---	---	---

Maximum baskets/hour	30
Maximum plates/hour	720

Interface

Panel	Utensil Dishwasher	Number of buttons	3
Display	4 digit	On/off indicator	Yes

Construction

Tank	With printed base	Rack guides	Welded
Tank material	Stainless steel AISI 304	Wash tank capacity	70 l
Back panel	Galvanized	Boiler capacity	17 l
Door	Double skinned	Protection class	IPX4
Counter balanced door	Yes	Net weight (kg)	244,000 kg
Tank filter	Stainless steel	Adjustable feet	120 mm
Wash arm	Stainless steel AISI 304	Drain max. height	950 mm
Rinse arm	Stainless steel AISI 304		

Consumption and connections

Tank heating element	4500 W	Water consumption per cycle	6 l
Boiler heating element	9000 W	Warm water connection	Cold 15°C
Default connection	12700 W	Inlet water maximum temperature	60°C
UW washing pump	1x2200W and 1x1500W	Max water hardness	12°FH - 7°dH
Electrical connection options	230 V 3~ / 18 kW / 50 Hz		

Electrical Connection

Plug	Not present
------	-------------

Manuals and Certifications


Certificate	CE
-------------	----

Equipment

Peristaltic detergent pump	Yes, electronic control	Rinse pump with H.T.R. system	Rinse pump with atmospheric boiler
Detergent (red) hose length	Yes, manual	Break tank	Yes
Peristaltic rinse aid pump	Yes, electronic control	Partial water exchange in the wash tank via built-in drain pump	Yes
Detergent flow rate	1.5 l/h	Lateral washing	Yes
Rinse aid (blue) hose length	Yes, manual	Water supply pipe diameter	16 mm
Rinse aid flow rate	0.4 l/h	Drain supply pipe diameter	21.5 mm
Soft Start	Yes	600x400 mm tray/box washing option	Yes
Boiler thermostop	Yes	1/1GN tray washing option	Yes
Drain pump	Yes		

Accessories Included

Cutlery basket	1 x WH00S02	Drain pipe	Yes - 2m
Water supply pipe	Yes - 2,5m		

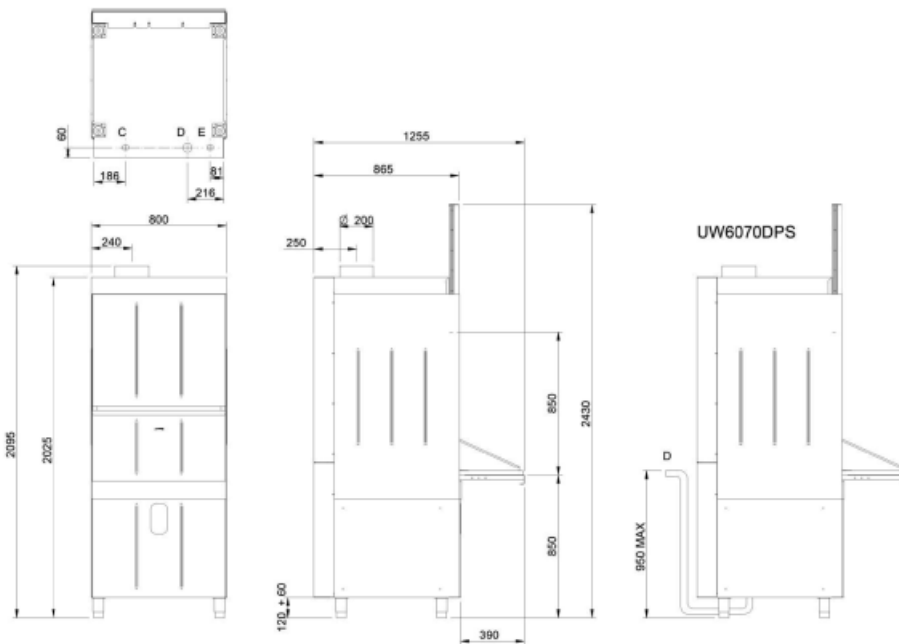

D - SCARICO 1/2", VIDANGE 1/2", DRAIN 1/2", ABFLUSS 1/2", DESAGÜE 1/2", СЛИВ 1/2"

C - CARICAMENTO ACQUA 1/2" GAS, CHARGEMENT EAU 1/2" GAZ, WATER INLET 1/2" GAS, ZUFLUSS 1/2" GAS, CARGA AGUA 1/2" GAS, НАБОР ВОДЫ 1/2" GAS


E - ALLACCIAMENTO ELETTRICO; BRANCHEMENT ÉLECTRIQUE; ELECTRIC CONNECTION; ELEKTRISCHER ANSCHLUSS; CONEXION ELECTRICA; ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

Not included accessories



WB6070G01

Utensilwasher wire basket with flat bottom 700x600



WH00S02

Basket for utensilwasher tools



WH00B02

Block for utensilwasher saccapoche



WH00B01

Insert for utensilwasher saccapoche

Symbols glossary



SUITABLE FOR EURONORM TRAY



Suitable for 1/1GN trays



MAX.USABLE HEIGHT 850mm