



Model
Chrome steel



Model
Anthracite

Model Grey matt



	D200	D325
	200 l	325 l
1:18	11 kg	18 kg
1:20	10 kg	16 kg

Features

- Industrial dryer for gentle fabric care
- Intuitive operation with 4.3" colour display
- «Expert» control with 18 standard programmes
- Robust construction for a long durability (Swiss made and designed for over 30,000 operating hours)
- High efficiency through axial-radial air flow and optimised waste heat recovery
- Stainless steel drum for efficient drying processes
- Maintenance-free direct drive and drum reversing
- Language selection button for 23 different languages
- Quiet: < 70 db (A)
- Pull-out fluff filter drawer (easy to use)
- Can be driven under with pallet trolleys for simple and efficient delivery and assembly
- Door hinge left (can be changed to right on site)

Options

- «Expert+» control with 18 standard and 53 professional programmes
- WLAN interface for programme and software updates
- Standard machine plinth (270 mm)
- Special machine plinth (380 mm)
- Connection for external fresh air (160 mm and 200 mm)
- Exhaust air connection reduced (160 mm)
- Potential-free contact for external ventilation control
- Mains blocking set (load shedding/current peak)

technical data proLine D200 / D325

Company or brand name		Schulthess	Schulthess
Appliance type		Dryer	Dryer
Type or sales description	proLine	D200	D325
Product No		4253	4255

Features

Load (1:18)	kg	11	18
Load (1:20)	kg	10	16
Drum capacity	l	200	325
Drum diameter	mm	728	728
Drum depth	mm	480	780
Diameter of filling aperture	mm	580	580
Evaporation rate	l/min	0,17	0,25
Drying rate	kg/h	20	32
Energy consumption ¹⁾	kWh / kWh/kg	6,25 / 0,57	10,0 / 0,56

Programmes

Programme duration ¹⁾	min	32	34
----------------------------------	-----	----	----

Ventilation installation

Extraction rate (max.)	m ³ /h	480	840
Air outlet	Ø mm	200	200
Cable resistance on site	max. Pa	200	200

Dimensions

Width	mm	790	790
Height	mm	1350	1350
Height with plinth	mm	1620	1620
Depth	mm	900	1200

Electric connection

Supply voltage	V	400 3N~	400 3N~
Connected load	kW	15	21,2
Heat output	kW	14,4	20,6
Performance Drive	kW	0,6	0,6
Fuse protection	AT	25	32


Safety and maintenance

Complies with Swiss safety regulations		yes	yes
Complies with the European Machinery Directive		2006 / 42 / EC	2006 / 42 / EC
Warranty	Year	1	1
Maintained by		authorized dealer	authorized dealer
Name and address of manufacturer		Schulthess Maschinen AG CH-6330 Cham ZG	Schulthess Maschinen AG CH-6330 Cham ZG
Country of origin		Switzerland	Switzerland

- 1 Electrical connection
- 2 Main switch
- 3 Emergency stop button
- 4 Type plate
- 5 Air outlet

Explanations • available – not available

1) Cotton cabinet dry, output moisture 47 %, residual moisture 0%

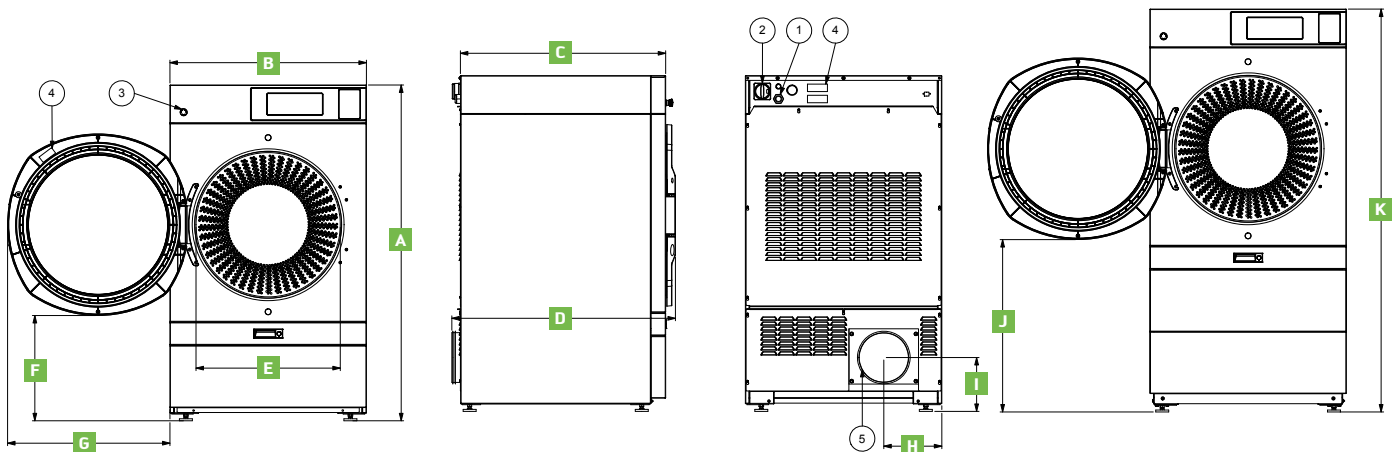

Dimensions

	A	B	C	D	E	F	G	H	I	J	K	Weight (kg)
D200	1350	790	825	900	580	425	655	235	220	695	1620	196
D325	1350	790	1125	1200	580	425	655	235	220	695	1620	233