


TUMBLE DRYERS

TRDS 11 · 16

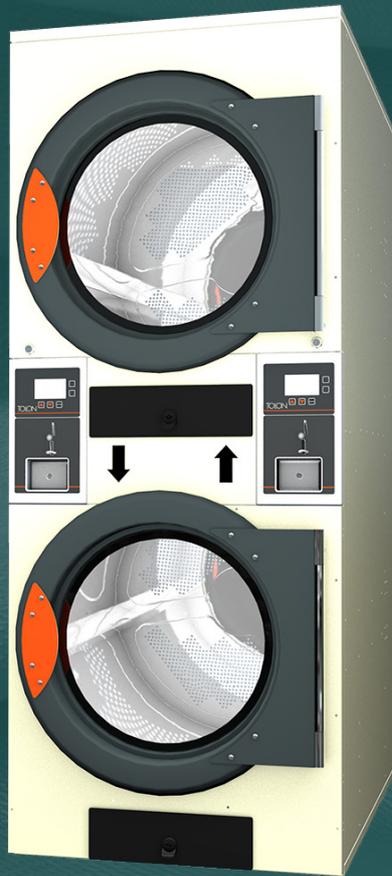

STANDARD FEATURES & BENEFITS

- Tumble dryer in skin plate, cream color
- Big loading door
- Direct drive through a gearbox, no pulley
- Time and temperature selection
- Reverse drum: all models offer the reverse turning of the drum
- Drum in galvanised steel
- Digital control, electronic control. Easy and intuitive to use, the electronic control offers complete control of the process
- Radial airflow circuit
- New filter drawer with wide surface and improved airflow. Filter grid is standard 0,6 mm for TRDS
- Cool down: anti-wrinkle at the end of cycle
- Models available in electric or gas heating
- Self-service: For TRDS, to connect to a central payment system or with 2 coiners; it can be ordered with 2 coin kits + boxes, a token kit can be ordered with the token box

OPTIONS

- Moisture control
- Double doorglass
- Stainless steel body
- Stainless steel front panel
- Low pressure steam battery
- Opposite door opening
- Lint filter with 0,6 or 1,2 mm
- Wooden box packing
- Special voltages
- Electronic coin kit
- Prepared for central payment

TOLON

TUMBLE DRYERS

TRDS 11 · 16

MODEL	UNIT		TRDS11	TRDS16
CAPACITY				
Dry load	1/20	kg	21	33
	1/18	kg	24	36
Performance		kg/h	36	53
Evaporation rate*		l/h	16,5	18,6
DRUM				
Drum diameter		mm	750	855
Drum depth		mm	475	746
Drum volume		l	210	330
DOOR (ROUND)				
Door opening Φ		mm	574	574
Center door height		mm	547 / 1522	547 / 1522
Bottom door height		mm	260 / 1235	260 / 1235
POWER				
Drum motor		kW	0,37 x 2	0,37 x 2
Fan motor		kW	0,25 x 2	0,25 x 2
Electric heating		kW	12 x 2	12 x 2
Total electric power		kW	25,34	25,34
Gas heating		kW	12,2	12,2
CONNECTIONS				
Voltage 230V- I + N + T	Electric	N° x mm ² / A	N/A	N/A
	Gas	N° x mm ² / A	3 x 1,5 / 20A	3 x 1,5 / 20A
Voltage 230V- III + T	Electric	N° x mm ² / A	4 x 25 / 80A	4 x 25 / 80A
	Gas	N° x mm ² / A	3 x 1,5 / 20A	3 x 1,5 / 20A
Voltage 400V- III + N + T	Electric	N° x mm ² / A	5 x 10 / 40A	5 x 10 / 40A
	Gas	N° x mm ² / A	3 x 1,5 / 20A	3 x 1,5 / 20A
DIMENSIONS (WDXH)				
Net		mm	785 x 972 x 1980	785 x 1242 x 1980
Packed		mm	865 x 1055 x 2126	865 x 1325 x 2126
WEIGHT				
Net		kg	260	290
Packed		kg	268	303
EXHAUST DATA				
Exhaust Connection Φ		mm	200	200
Airflow	max	m ³ /h	1000	1000
SOUND PRESSURE				
Sound level		db(A)	64	64

* It may vary depending on the type of heating, filter cleanliness or extraction type.